

Experimental Analysis of the Performance Characteristics of Single Cylinder Diesel Engine Fueled Using Kerosene-Diesel Blend

Azeem Hafiz P A¹, Naveen Sankar G M², Murali Mohan R K³,
Bilal Mohammed⁴
¹HOD, ^{2,3,4}Students

Department of Mechanical Engineering, ACE College of Engineering, Trivandrum, India

International Journal of Research in Mechanical Engineering
Volume 4, Issue 3, May-June, 2016, pp. 70-74
ISSN Online: 2347-5188 Print: 2347-8772, DOA: 27052016
© IASTER 2016, www.iaster.com



ABSTRACT

The Fast depletion of fossil fuel, swift increase in the price of petroleum products and harmful exhaust emission from the engine collectively created renewed interest among researchers to find out suitable blend. The effects of kerosene-diesel blends on the operation of a diesel engine were investigated in this study when fuelled with neat diesel and Kerosene-Diesel blend in various proportions. Standard experimental procedures were adopted. An Experimental study was conducted to evaluate the characteristics of blending kerosene with diesel fuel on the performance characteristics of a kirloskar made single cylinder 4-stroke diesel engine. Three levels of blend 10%, 20% and 30% of kerosene blending by volume with diesel fuel and they were designated as K10, K20 and K30 respectively, while pure diesel was considered as a baseline and named D. Performance parameters that were studied involve mechanical efficiency, brake thermal efficiency, exhaust temperature and specific fuel consumption.

Keywords: Brake Thermal Efficiency, Diesel Engine, Diesel-Kerosene Blend, SFC.

1. INTRODUCTION

The diesel engine's reputation as a noisy, smoky and sluggish power plant has change due to modern diesel technology which allows one to combine the inherent low fuel consumption with excellent driving performance and low emission characteristics [1, 2, 3]. The term "diesel engine" is used throughout the world to denote compression ignition oil engines, two or four stroke, with airless fuel injection. Such engines produce greater power and are adaptive to wide range of fuels [4].

One of the important characteristics of a diesel fuel is its ability to autoignite. A characteristic that is quantified by the fuel's cetane number or index, a greater cetane number or index means that the fuel ignites more quickly [5]. The cetane number of a fuel indicates the self-igniting capability of the fuel and has a direct impact on ignition delay. The higher the cetane number, the shorter the ignition delay and vice versa [5]. High cetane number fuel encourages early and uniform ignition of the fuel. Blends of kerosene and diesel fuel can be used in unmodified diesel engines [6, 7, 8]. The objective of this study was to determine the effect of kerosene blends on diesel engine performance characteristics. Engine performance characteristics are major criteria that govern the suitability of a fuel.

The gelling of the diesel fuel in cold climates is a common phenomenon and diesel fuel suppliers, as well as customers and diesel engine designers, became aware over time to manage the cold flow

problems associated with Number 2 diesel fuel in the winter time [9]. Several studies [10, 11, 12, 13] have been done by using different blends with kerosene to enhance the performance of a small high speed diesel engine under high load condition. In Nihon University, Japan, a researcher tested a single cylinder, water cooled diesel engine running with blends of a heavy fuel and low grade kerosene oil for comparison of performance to diesel and the results showed that a mixture of 60% fuel oil and 40% kerosene improved thermal efficiency fairly in case of heavy loading [14]. A researcher in his research, blended kerosene with diesel fuel in various proportions and mentioned that it contributes slight increase in engine emissions [15].

Different studies are done on biodiesels and different types of kerosene based fuels to adapt them for diesel engines and diesel power generators [16, 17, 18, 19]. The studies are generally done with different blends of biodiesel and kerosene with diesel.

2. MATERIALS AND METHODS

2.1 Fuel Used

Many developing countries in the world produce single grade of diesel fuel (gas oil) for use. It is used in compression ignition IC engines. The same fuel is being used as a heating fuel oil in residential heating and industrial furnaces. As an example kerosene is used in domestic application for cooking and space heating [20]. The diesel fuel and kerosene samples used in this study were commercially available in the local market. Pure diesel fuel (named D) was purchased from local fuel station and used as base line fuel. Three blends of diesel – kerosene (with 10%, 20% and 30% kerosene blending by volume) were named K10, K20 and K30 respectively, were used in this experiment.

Table 1: Properties of the Fuel

Fuel	Diesel (IS 1460:2005)	Kerosene (IS:2796- 2008)
Formula	C ₁₂ H ₂₆	C ₁₀ H ₂₂
Calorific value	44500	45400
Density at 15°C kg/m ³	820- 845	791-795
Kinematic viscosity(cst) at 40°C	2-4.5	1.389
Flash point °C min	35	41
Self ignition temperature	725	640

2.2 Test Engine

The experiment was conducted in a single cylinder four stroke diesel engine. The specification of the tested engine is shown in Table 2.

Table 2: Engine Specification

Item	Specification
Engine Manufacture	Kirloskar
Fuel Type	Diesel
No. of Cylinders	1
Max. Power	5.HP @ 1500 rpm
Bore	80 mm
Stroke	110 mm

2.3 Test Procedure

The system is drained initially and refilling with pure diesel fuel (D) before commencing test requires, for warming up, the engine run without load for 20 minutes. The speed of the engine was increased at the same load until the engine becomes stable, which is being determined from the exhaust temperature. Engine speed was fixed at 1500 rpm and the engine is run for 2 minutes at that fixed

speed and load. The data required in the analysis was obtained with the help of Electronic Data Acquisition System connected to the test engine at varying load values by loading using an Electrical Dynamometer Loading. Then, the pure diesel specimen (D) was replaced with the specimen K10, K20 and K30 and the performance data are gathered at varying load conditions and the graphs are plotted.

3. RESULTS AND DISCUSSIONS

a) Fig. 1 shows the effect of fuel type on Brake Thermal Efficiency (η_{BTE}) and Fig. 2 shows the effect of Mechanical Efficiency (η_{mech}) at different loads with engine run at 1500 rpm. It has been seen from the figure that the BTE as well as mechanical efficiency first increases as load increase and falls with increase in load after some time. for all types of fuel tested. Brake thermal efficiency and Mechanical efficiency is always found to be higher with increasing the kerosene blends as compared with baseline diesel fuel.

b) Fig. 3 shows the exhaust gas temperature variations for the test fuels with rated load. It was observed that the temperature of the exhaust gas increases with the load because more fuel is burnt at higher loads to meet the power requirement. It was also observed that the exhaust gas temperature increased with percentage of kerosene in the test fuel for all load conditions.

c) Fig. 4 shows the variations of specific fuel consumption (SFC) of various kerosene-diesel blends as a function of rated load. Specific fuel consumption decreased with increase in engine load. This reduction in the SFC can be attributed to the higher calorific value of kerosene as compared to diesel fuel. In order words, only less quantity of fuel is needed to produce the same amount of energy.

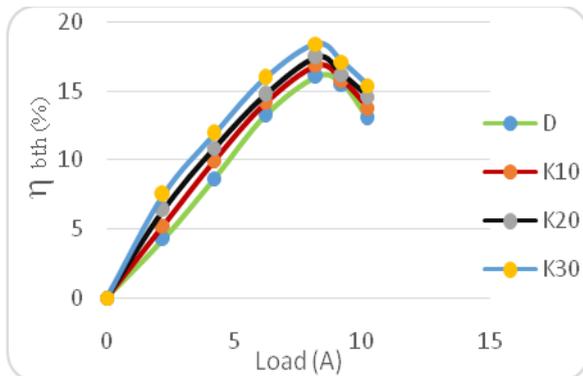


Fig 1- Plot of Brake Thermal Efficiency (η_{bth}) vs Load

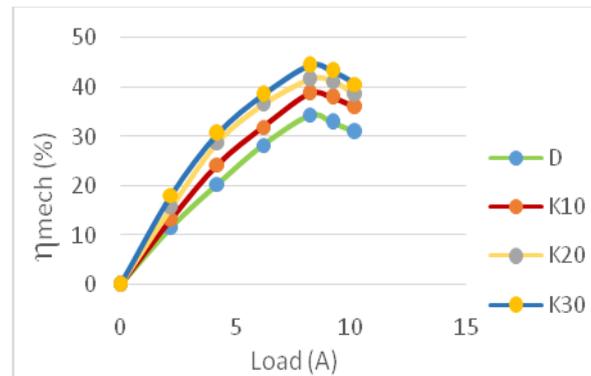


Fig 2- Plot of Mechanical Efficiency (η_{mech}) vs Load

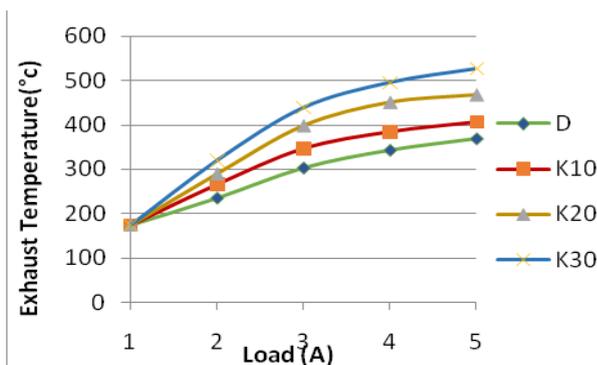


Fig 3- Plot of Exhaust Temperature vs Load

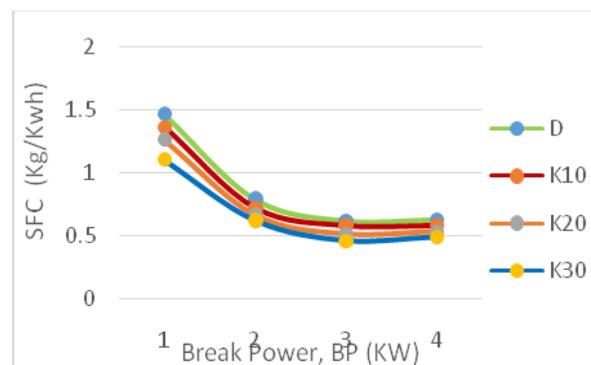


Fig 4- Plot of Specific Fuel Consumption, SFC vs Break Power, BP

5. CONCLUSIONS

The performances of four stroke single cylinder diesel engine, when operating with different fuel blends at rated rpm and rated load conditions have been experimentally investigated in the present study and the following results were obtained.

a) Brake thermal efficiency (η_{BTE}) and Mechanical efficiency (η_{mech}) slightly increases with increase in the concentration of kerosene in kerosene-diesel blends as compared with pure diesel fuel . This is because of the fuel properties such lower viscosity, density, and higher calorific value of blends K10, K20 and K30.

b) The exhaust gas temperature increased with increase in percentage concentration of kerosene in the kerosene-diesel blends as compared with pure diesel fuel for all load conditions. This may be due to the oxygen content of kerosene, which improves combustion and thus may increase the exhaust gas temperature

c) The Specific fuel consumption (SFC) decreased with increase in percentage concentration of kerosene in the kerosene-diesel blends as compared with pure diesel fuel. Decrease in SFC of the blended fuels was due to faster combustion and evaporation of the blend particles as compared with diesel fuel.

6. ACKNOWLEDGEMENTS

We are immensely proud to complete this research paper on time. We would like to thank Dr. Farrukh Sayeed, Principal, ACE College of Engineering, for his immense support to complete this paper. We also thank all the faculties and students of Mechanical Engineering Department of ACE College of engineering who have helped to complete this study. Last but not the least; we would like to thank God for showering his blessings on us.

REFERENCES

- [1] Jacobs, T.; Bohac, S.; Assanis, D. and Szymkowicz, P. 2005. Lean and Rich Premixed Compression Ignition Combustion in a Light-Duty Diesel Engine, *SAE Technical Paper No. 2005-01-0166*.
- [2] McCallan, R.; Couch, R.; Leonard, A.; Brady, M.; Salari, K.; Rutledge, W.; Ross, J.; Storms, B.; Heineck, J. T.; Driver, D.; Bell, J. and Zilliac, G. 1999. Process in Reducing Aerodynamic Drag for Higher Efficiency of Heavy Duty Trucks (Class 7-8), *SAE Technical Paper No. 1999-01-2238*.
- [3] Tatur, M.; Laermann, M.; Koehler, E.; Tomazic, D.; Holland, T.; Robinson, D.; Dowell, J. and Price, K. 2007. Development of an Emissions Control Concept for an IDI Heavy-Duty Diesel Engine Meeting 2007 Phase-In Emission Standards, *SAE Technical Paper No. 2007-01-0235*.
- [4] Kowalewicz, A. and Wojtyniak, M. 2005. Alternative Fuels and their Application to Combustion Engines, *Journal of Automobile Engg. 219(1)*: pp 103-125.
- [5] Cngur, Y. and Altiparmak, D. 2003. Effect of Fuel Cetane Number and injection Pressure on a DI Diesel Engine Performance and Emissions, *Energy and Conservation Management. 44 (3)*: pp 389-397.

- [6] Matouq, M.; Amaraneh, I. A.; Kloub, N. Badran, O.; Al-Duheisat, S. A. and Eslamian, S. 2009. Investigating the Effect of Combustion of Blending Jordanian Diesel Oil with Kerosene on Reducing the Environmental Impacts by Diesel Engine, *International Journal on Ecological Econ. and Statistics*. 13: pp 103-201.
- [7] Reddy, K. T.; Reddy, P. R. and Murthy, P. V. R. 2008. Experimental Investigations on the Dual Fueled Diesel Engine, *Asian Journal of Scientific Research*. 1(4) pp 29- 436.
- [8] Sethi, V. P. and Salariya, K. S. 2004. Exhaust Analysis and Performance of a Single Cylinder Diesel Engine Run on Dual Fuels, *IE (I) Journal- MC*. 85: 101-107.
- [9] Azad,A.K., Ameer Uddin,S.M. and Alam, M.M., Experimental study of DL diesel engine performance using bio diesel blends with Kerosene; *International Journal of Energy and Environment*; 2013; Vol.4; Issue 2; pp. 265- 278, Bangladesh.
- [10] Hyzayyin,A.S., Bawady,A.H., Rady,M.A. and Dawood,A., Experimental Evaluation of Diesel Engine Performance and Emission Using Blends of Jojoba Oil and Diesel Fuels; 2004; *Energy Compression and Management*, Vol. 45 pp. 2093-2112.
- [11] Narayan, C.M., Vegetable Oil as Engine Fuel Prospect and Retrospect; *Proceeding of Recent Trends in Automotive Fuels*, 2002 Nagpur, India.
- [12] Osueke C.O., et al, Fuel Adulteration in Nigeria and its Consequences; *International Journal of Mechanical & Mechatronics Engineering IJMME*; 2011 Vol: 11 No.4 pp. 32-35. Nigeria.
- [13] Labeckas G, Slavinskas S. Combustion Phenomenon, Performance and Emissions of a Diesel Engine with Aviation Turbine JP-8 Fuel and Rapeseed Biodiesel Blends. *Energy Convers Manage* 2015;105:216–29.
- [14] Chong CT, Hochgreb S. Measurements of Laminar Flame Speeds of Liquid Fuels: Jet-A1, Diesel, Palm Methyl Esters, and Blends Using Particle Imaging Velocimetry (PIV). *Proc Combust Inst* 2011;33(1):979–86.
- [15] Solmaz H, Yamik H, _ İcingür Y, Calam A. Investigation of the Effects of Civil Aviation Fuel Jet A1 Blends on Diesel Engine Performance and Emission Characteristics. *Indian J Eng Mater Sci* 2014;4:200–6.
- [16] Labeckas G, Slavinskas S, Vilutiene V. Effect of the Cetane Number Improving Additive on Combustion, Performance, and Emissions of a DI Diesel Engine Operating on JP-8 Fuel. *J Energy Eng* 2015;141(2):1–14.
- [17] Akash, B. and M. Mohsen, 1999. Energy Analysis of Jordan's Urban Residential Sector. *International Journal of Energy*, Vol.5, No.4, pp 823-831.
- [18] Kumar Reddy, V.K., *Experimental Investigation on the Use of Vegetable Oil Fuels In A 4-Stroke Single Cylinder Diesel Engine*;2000,PhD Thesis, submitted at JNTU, Anantapur.
- [19] Steven, R. W., and Maurice E. L., Survey of Diesel Fuels and Aviation Kerosene From U.S. Military Installations, Presented at the 6th *International Conference on Stability and Handling of Liquid Fuels*,1997,pp.13- 17,Vancouver, B.C., Canada.
- [20] Ameer Uddin,S.M., Azad,A.K., Alam,M.M. and Ahmed, J.U., Performance of a Diesel Engine Run with Mustard-Kerosene Blends, *the 6th BSME International Conference on Thermal Engineering*, Procedia Engineering 105 (2015) pp 698-704.